

HEATSTRIP® 



LEADING HEATING  
TECHNOLOGY



# CONTENTS

---

06	About HEATSTRIP
10	HEATSTRIP Classic
14	HEATSTRIP Design
20	HEATSTRIP Elegance
26	HEATSTRIP Max
32	HEATSTRIP Enhance
36	HEATSTRIP Intense
44	HEATSTRIP Indoor
52	HEATSTRIP Hospitality



## ABOUT HEATSTRIP

**HEATSTRIP** outdoor gas and electric heaters are proudly designed, engineered and supplied in Australia and exported to world markets. **HEATSTRIP** has been engineering innovative, stylish and energy efficient products since 1988. With **HEATSTRIP** innovative heating solutions there is no need to abandon the outdoor area or compromise your style with bulky and unpleasant heaters. Worldwide , many large venues enjoy the style and performance that **HEATSTRIP** has to offer. While they are suitable for commercial use, our award-winning heaters are also ideal for residential alfresco areas.

## A TRUSTED NAME

**HEATSTRIP** heaters are recommended by many of the world's top architects, designers, consultants and specifiers, who trust in the world-class quality, performance and aesthetics.



---

HEATSTRIP has been widely recognised for world-class design and innovation. In 2017, the HEATSTRIP Portable LPG heater (model TGH34PL) won a Good Design Australia Selection. In 2013, HEATSTRIP classic-design was awarded coveted Australian Business Award for Product Value.





## The HEATSTRIP story

**Thermofilm is justly proud that HEATSTRIP is the original design of this style of patio and conservatory heaters, the number one brand for reliability and is firmly established as the market leader on an international scale.**

The HEATSTRIP brand was first established in Australia in 2004 when the product design team at Thermofilm (established in 1988) recognised the opportunity for a new style of electric radiant heaters. The first model was designed for indoor use and was an immediate success as architects and engineers specified them for schools, commercial buildings and many other applications.

It was a natural progression to further develop HEATSTRIP for outdoor application. Because of the higher operating temperature required for the outdoor model this presented some unique engineering challenges and required thousands of hours of development and testing time to perfect the revolutionary design.

This has resulted in a range of 6 different series of products within the HEATSTRIP product category: Elegance, Design, Max, Intense, Indoor and the Gas heater (Good Design Australia Selection). No matter what your requirements are, you will be able to find the indoor or outdoor heater for you from our extensive selection of solutions. Design and Elegance range is also available now with remote or app function.

Whatever your needs are, you will be able to find your indoor or outdoor heating in our extensive selection of solutions.

# THE HEATER THAT IS A DESIGN FEATURE!



## What is a HEATSTRIP?

A HEATSTRIP is a high intensity electric radiant heater suitable for outdoor and tough indoor heating, preferably under canopies. It can heat a terrace within 10 minutes and is felt up to 4 meters from the source, depending of the type. The HEATSTRIP distinguishes itself by its modern appearance.

### Advantages HEATSTRIP:

- Uses minimal space
- Stylish
- Does not become red hot
- Energy saving
- Low maintenance
- Suitable for built-in
- Design and development in Australia

### TT-MTR and TT-MTM Wall Controller with remote control:

This HEATSTRIP has been designed for ease of use to ensure economic running costs of your heater. It provides a timer for automatic heater operation. The timer function has four settings. It can turn the heater on for 1 hour, 2 hours, 4 hours or constantly on. The TT-MTM controller has also an timer function but you are also able to adjust the temperature output of the HEATSTRIP in high, medium or low. The timer can be operated where it is installed or via remote control unit. The remote control has a range of 10 metres and must be within line of sight of the wall switch.



Timer + remote  
TT-MTR - TT-MTM

TT-MTM

TT-MTR

## HEATSTRIP Classic



## HEATSTRIP Design



## HEATSTRIP Elegance



## HEATSTRIP Max



## HEATSTRIP Enhance



## HEATSTRIP Intense



## HEATSTRIP Indoor




## HEATSTRIP Gas Portable LPG Heater





## HEATSTRIP

Application	Enhance	Intense	Max	Elegance	Design	Indoor
Indoor insulated areas: classrooms, offices, bathrooms, wet areas, drying rooms.	✓	✓	✗	✓	✓	✓
Outdoor under cover: café, veranda, patio, balcony ceiling height 2,7m or less.	✓	✓	✓	✓	✗	✗
Outdoor under cover: café, veranda, patio, balcony ceiling height 2,7m to 3,5m.	✓	✓	✓	✗	✗	✗
Indoor open area: warehouse, factory, production areas, sports facilities.	✓	✓	✓	✓	✓	✓
Indoor spot heating, above tables, assembly areas.	✓	✓	✓	✓	✓	✓

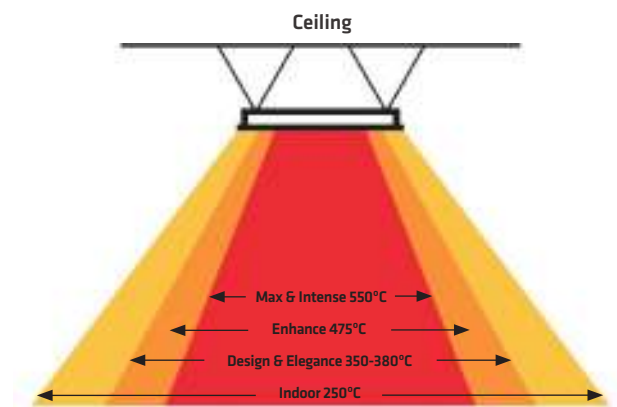

# HEATSTRIP<sup>®</sup> Classic









## HEATSTRIP® Classic

Premium quality, stylish & slimline electric radiant heaters perfect for protected outdoor and indoor applications. Make it a feature in your outdoor area

### Features:

- Electric radiant heater ideal for your protected alfresco area, pergola, veranda, café or difficult to heat indoor areas
- 3 Models available THH1800A (1800W), THH2400A (2400W) & THH3200A (3200W)
- Stylish, sleek, unobtrusive design with a black front profile
- Efficient, cost-effective heating providing gentle warmth
- Corrosion protected for even the toughest environment
- Easy DIY installation for 2 models (THH1800A & THH2400A. THH3200A must be installed by a licensed electrician) and multiple mounting options
- 2-year residential warranty and 1-year commercial warranty
- Australian designed and engineered



Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THH1500	3.0 m <sup>2</sup>	3.75 m <sup>2</sup>	1500	6.3	924 x 165 x 48	5	1000	Yes	2.1 m	2.7 m
THH2400	5.0 m <sup>2</sup>	6 m <sup>2</sup>	2400	10	1364 x 165 x 48	6	1000	Yes	2.1 m	2.7 m
THH3200	6.0 m <sup>2</sup>	8 m <sup>2</sup>	3200	13.3	1774 x 165 x 48	8	1000	No	2.1 m	2.7 m



## Accessories



Extension mounting bracket  
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket




Standard mounting bracket




Flush mount enclosure  
*\*Also available in matte black*



## Table setting



6x2400W




2x 2400W

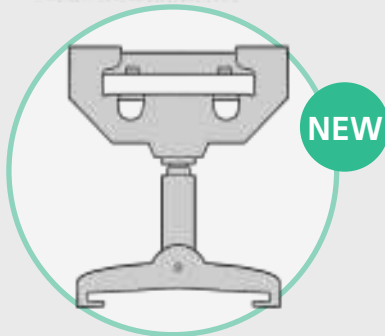


## Mounting options


Mounting

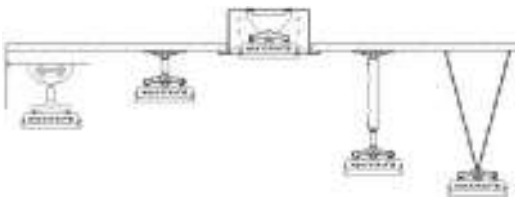

Extension mounting bracket

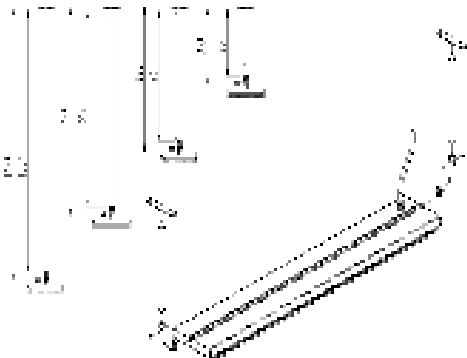

Flush mounting  
bracket

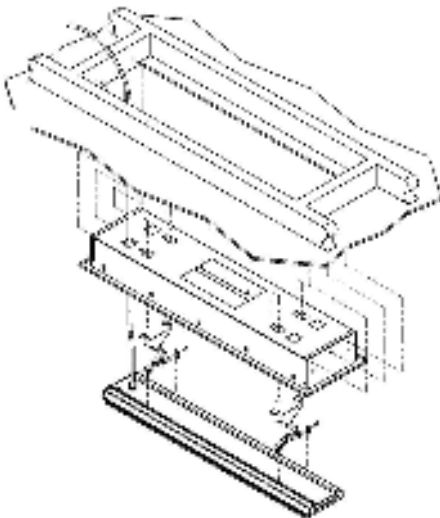

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THH1500	THHAC-009	980 x 230	1030 x 280 x 125
THH2400	THHAC-011	1420 x 230	1470 x 280 x 125
THH3200	THHAC-012	1830 x 230	1880 x 280 x 125



# HEATSTRIP<sup>®</sup> Design









## HEATSTRIP® Design All Black

HEATSTRIP Design is a stylish, high-quality electric heater with a high intensity. The HEATSTRIP radiant heater is more energy efficient than traditional gasheaters! A HEATSTRIP is perfect to use in covered places at home, as well as commercial places like restaurants, cafes and sporting clubs. The Design unique “All Black” colour can perfectly blend in with the ceiling in your patio area.

### Features:

- Casing made of high-grade aluminium
- Complete with adjustable mounting supports suitable for walls and ceilings
- The device comes with an electric lead and plug (1500W + 2400W)
- The radiation panel itself is black, and produces no red glow
- Voltage 230V, for United Kingdom 240V
- The maximum mounting height is 2.70 m
- The recommended mounting height is approx. 2.50 m
- The minimum mounting height is 2.10 m, for safety reasons (the radiation panel surface reaches a temperature of at least 350°C)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty

HEATSTRIP has successfully enabled many entertainment venues such as restaurants, pubs and clubs to utilise their outdoor dining areas day and night, through all seasons.



Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THD2400EU	3.0 m <sup>2</sup>	3.75 m <sup>2</sup>	2400	6.3	1200 x 170 x 50	5	1000	Yes	2.1 m	2.7 m
THD3600EU	5.0 m <sup>2</sup>	6 m <sup>2</sup>	3200	10	1800 x 170 x 50	6	1000	Yes	2.1 m	2.7 m

## Accessories



Extension mounting bracket  
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket




Standard mounting bracket




Flush mount enclosure



## Table setting



6x2400W




2x 2400W




## Mounting options


Mounting

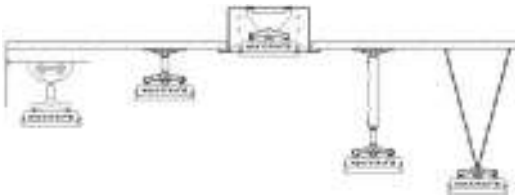

Extension mounting bracket

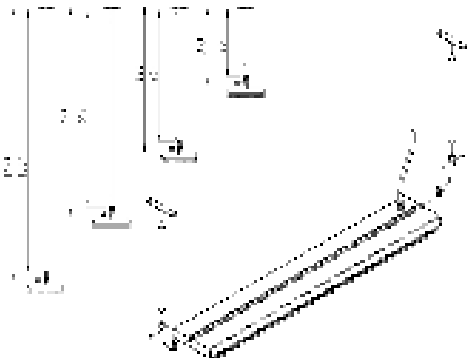

Flush mounting  
bracket

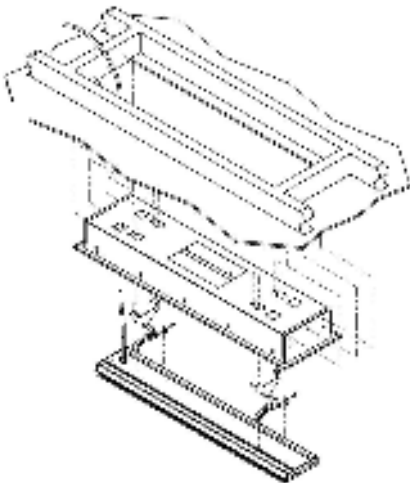

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THD2400EU	THDAC-061	1260 x 240	1310 x 290 x 125
THD3600EU	THDAC-062	1860 x 240	1910 x 290 x 125




## HEATSTRIP® Design + remote

Choice of: Timer + Low/High or Smart App version

The HEATSTRIP Design with remote is a high intensity electric radiant heater suitable for outdoor and tough indoor heating. The HEATSTRIP Design is thin but functional and can heat a terrace within 10 minutes. The remote function gives you the possibility to use the timer function and switch in output (medium or high). Energy savings and a great performance can be expected. It should be preferably be used under a roof outdoors in order to prevent loss of heat.

### Features:

- Electric radiant heater perfect for your protected alfresco area, pergola, verandah or café
- The elegant, slimline design and "off-white" colour blends seamlessly with most white ceilings
- World leading element design produces a more compact and higher output heater
- The device comes with an electric lead and plug (2400W)
- Voltage 230V, for United Kingdom 240V
- Significantly more cost-effective than bottled gas heaters
- 2 different steps of energy use plus timer function of 1,2 or 4 hour.  
Step 1 ON-H, HEATSTRIP works at full power: 100%  
Step 2 ON-L, HEATSTRIP works at 70 % power, so it uses less energy.
- Convenient DIY installation of 1800W and 2400W models, 3600W model must be hard wired
- The minimum mounting height is 2.10 m for safety reasons (the radiation surface reaches a temperature of about 350°C)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty
- Tuya smart app is compatible with Iphone / Android, Alexa and Google Hub

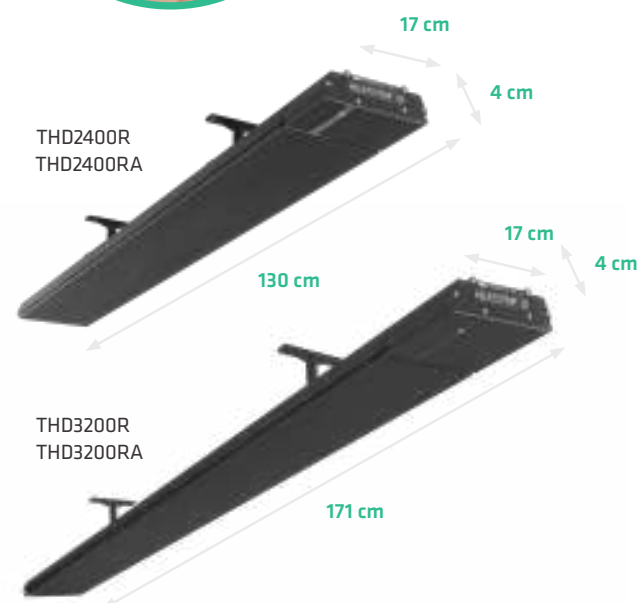

Compatible with  
Iphone / Android  
Alexa, Google Hub

Powered by  
**tuya**  
Intelligence  
Inside



2400W/3200W  
(remote)

Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THD2400R	4 m <sup>2</sup>	6 m <sup>2</sup>	2400	10	1306 x 170 x 43	6	3000	Yes	2.1 m	2.7 m
THD3200R	5 m <sup>2</sup>	8 m <sup>2</sup>	3200	13	1710 x 170 x 43	9	3000	No	2.1 m	2.7 m
THD2400RA	4 m <sup>2</sup>	6 m <sup>2</sup>	2400	10	1306 x 170 x 43	6	3000	Yes	2.1 m	2.7 m
THD3200RA	5 m <sup>2</sup>	8 m <sup>2</sup>	3200	13	1710 x 170 x 43	9	3000	No	2.1 m	2.7 m



## Accessories



Extension mounting bracket  
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket



Standard mounting bracket





Flush mount enclosure

## Table settings




6x2400 Watt




## Mounting options


Mounting

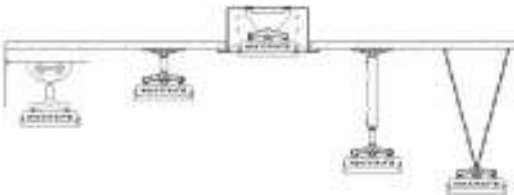

Extension mounting bracket

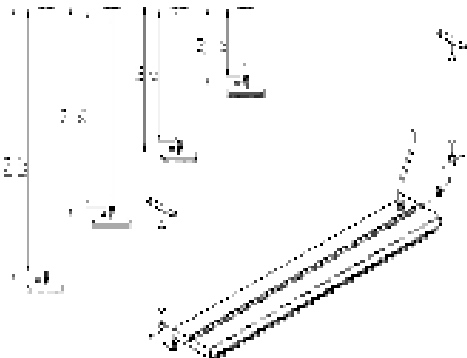

Flush mount enclosure

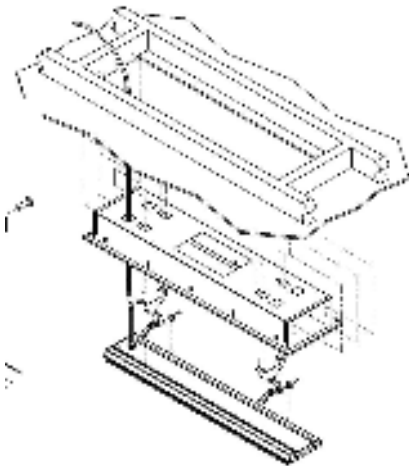

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THD2400R	THDAC-058	1385 x 235	1439 x 290 x 125
THD3200R	THDAC-059	1785 x 235	1839 x 290 x 125
THD2400RA	THDAC-058	1385 x 235	1439 x 290 x 125
THD3200RA	THDAC-059	1785 x 235	1839 x 290 x 125

# HEATSTRIP<sup>®</sup> Elegance










## HEATSTRIP® Elegance

HEATSTRIP Elegance is a range of stylish, premium, high-intensity electric panel heaters. With huge running cost savings compared to bottled gas heaters, HEATSTRIP is ideal for outdoor undercover protected applications, both residential and commercial. The first off-white outdoor heater utilizes the latest technology for maximum comfort. Using the latest material coating and heating element technology.

### Features:

- Electric radiant heater perfect for your protected alfresco area, pergola, verandah or café
- The elegant, slimline design and “off-white” colour blends in seamlessly with most white ceilings
- World leading element design produces a more compact and higher output heater
- The device comes with an electric lead and plug (1800W + 2400W)
- Voltage 230V, for United Kingdom 240V
- Significantly more cost-effective than bottled gas heaters
- Convenient DIY installation of 1800W and 2400W models, 3600W model must be hard wired
- The minimum installation height is 2,10 meters.  
(The panel reaches a temperature of 400 degrees celsius)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty

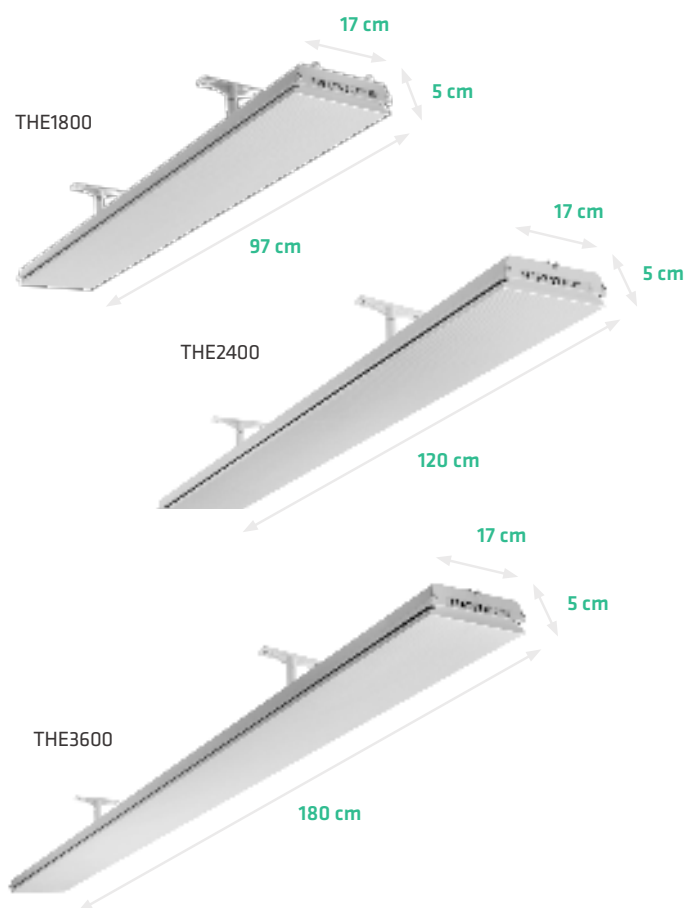

Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THE1800	3 m <sup>2</sup>	4,5 m <sup>2</sup>	1800	7.5	974 x 170 x 48.5	4	1000	Yes	2.1 m	2.7 m
THE2400	4 m <sup>2</sup>	6 m <sup>2</sup>	2400	10	1204 x 170 x 48.5	7	1000	Yes	2.1 m	2.7 m
THE3600	6 m <sup>2</sup>	9 m <sup>2</sup>	3600	15	1804 x 170 x 48.5	9	1000	No	2.1 m	2.7 m



## Accessories



Extension mounting bracket  
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket




Standard mounting bracket





Flush mount enclosure

## Table settings




6x2400 W

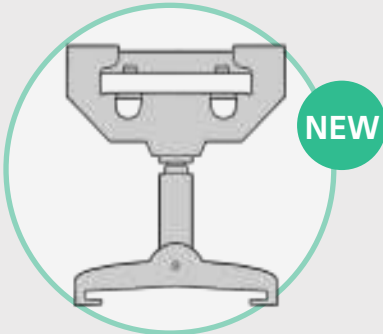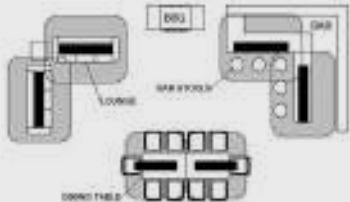


## Mounting options


Mounting

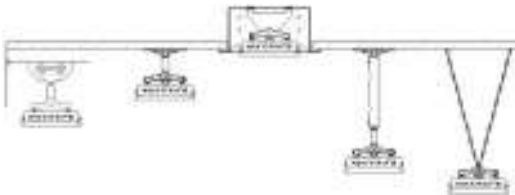

Extension mounting bracket

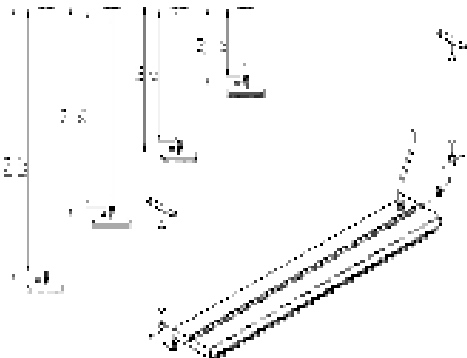

Flush mount enclosure

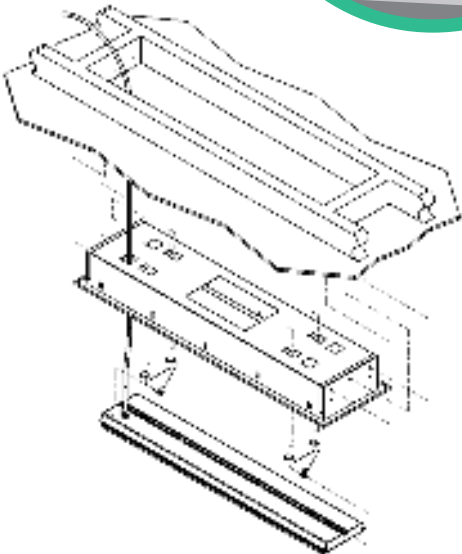

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THE 1800	THEAC-040	1030 x 240	1080 x 290 x 125
THE 2400	THEAC-041	1260 x 240	1310 x 290 x 125
THE 3600	THEAC-042	1860 x 240	1910 x 290 x 125





## HEATSTRIP® Elegance + remote

Choice of: Timer + Low/High or Smart App version

HEATSTRIP Elegance is a range of stylish, premium, high-intensity electric panel heaters. With huge running cost savings compared to bottled gas heaters, HEATSTRIP is ideal for outdoor undercover protected applications, both residential and commercial. The first off-white outdoor heater utilizes the latest technology for maximum comfort. Using the latest material ceramic coating and heating element technology.

### Features:

- Electric radiant heater perfect for your protected alfresco area, pergola, verandah or café
- The elegant, slimline design and "off-white" colour blends in seamlessly with most white ceilings
- World leading element design produces a more compact and higher output heater
- The device comes with an electric lead and plug (2400W)
- Voltage 230V, for United Kingdom 240V
- Significantly more cost-effective than bottled gas heaters
- 2 different steps of energy use plus timer function of 1,2 or 4 hour.  
Step 1 ON-H, HEATSTRIP works at full power: 100%  
Step 2 ON-L, HEATSTRIP works at 70 % power, so it uses less energy.
- Convenient DIY installation of 1800W and 2400W models, 3600W model must be hard wired
- The minimum mounting height is 2.10 m . for safety reasons (the radiation surface reaches a temperature of about 400°C)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty
- Tuya smart app is compatible with Iphone / Android, Alexa and Google Hub



Compatible with  
Iphone / Android  
Alexa, Google Hub

Powered by  
**tuya**  
Intelligence  
Inside



2400W/3200W  
(remote)

Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THE2400R	4 m <sup>2</sup>	6 m <sup>2</sup>	2400	10	1306 x 170 x 43	6	1000	Yes	2.1 m	2.7 m
THE3200R	5 m <sup>2</sup>	8 m <sup>2</sup>	3200	13	1710 x 170 x 43	9	1000	No	2.1 m	2.7 m
THE2400RA	4 m <sup>2</sup>	6 m <sup>2</sup>	2400	10	1306 x 170 x 43	6	3000	Yes	2.1 m	2.7 m
THE3200RA	5 m <sup>2</sup>	8 m <sup>2</sup>	3200	13	1710 x 170 x 43	9	3000	No	2.1 m	2.7 m

## Accessories



Extension mounting bracket  
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket



Standard mounting bracket





Flush mount enclosure

## Table settings



6x2400 W

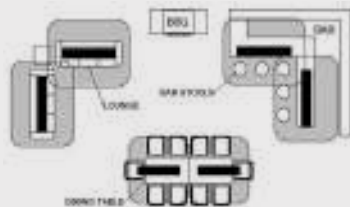


NEW




## Mounting options


Mounting

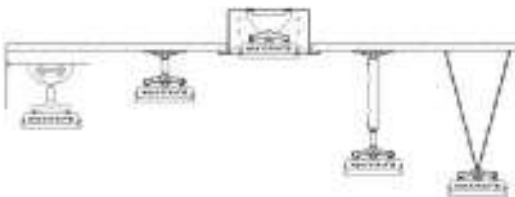

Extension mounting bracket

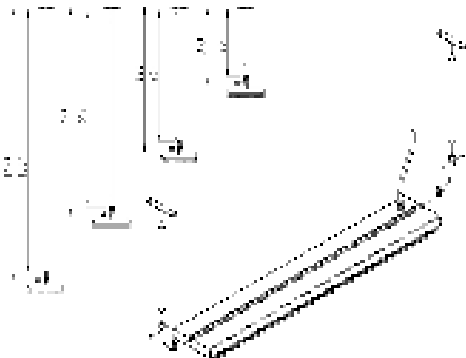

Flush mount enclosure

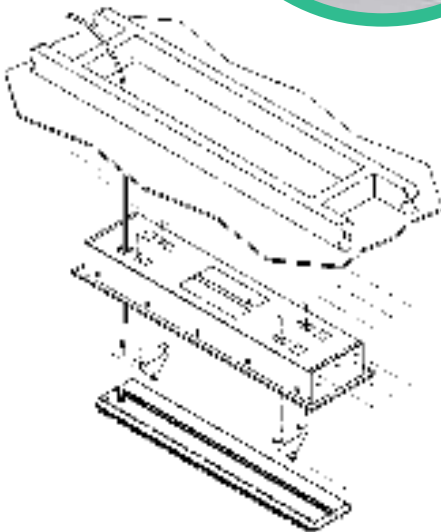

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THE2400R	THERAC-056	1385 x 235	1439 x 290 x 125
THE3200R	THERAC-057	1785 x 235	1839 x 290 x 125
THE2400RA	THERAC-056	1385 x 235	1439 x 290 x 125
THE3200RA	THERAC-057	1785 x 235	1839 x 290 x 125

# HEATSTRIP<sup>®</sup> Max











## HEATSTRIP® Max

HEATSTRIP Max is an electric radiant heater that can be used indoors or outdoors with high quality, robust X heater grille design.

### Features:


- High output radiant heat
- Unique Soft-glow heating technology, no dazzling red glow
- Suitable for permanent use outdoors
- 2 (2400W) or 3 (3600W) unique Incoloy 840 elements with a diameter of 14mm, which can't be broken. Total different if you compare it with a glass element. Incoloy 840 is high end quality and is used often by bridgebuilders, shipbuilders and in the offshore industry.
- The device comes with an electric lead and plug (2400W)
- Voltage 230V, for United Kingdom 240V
- Low-maintenance and protection against corrosion
- Powerful incoloy element
- High quality
- The minimum mounting height is 2.10 m, for safety reasons. (the radiation panel surface reaches a temperature of at least 550°C)
- Australian design and development
- IPX5 This means that the Heatstrips are 100% rain and weatherproof

### Unique Soft-glow technology

The specially designed and developed Soft-glow heating element produces a very gentle and discrete warmth. There is no dazzling glow, as is the case with other infrared heaters, so you can simply enjoy the warmth in peace.

### High quality – four-year replacement guarantee

The HEATSTRIP Max is made of a very robust and high-quality material. This makes the HEATSTRIP Max durable, and it has a long usable life under all conditions. 4 year residential warranty and 2 year commercial warranty.

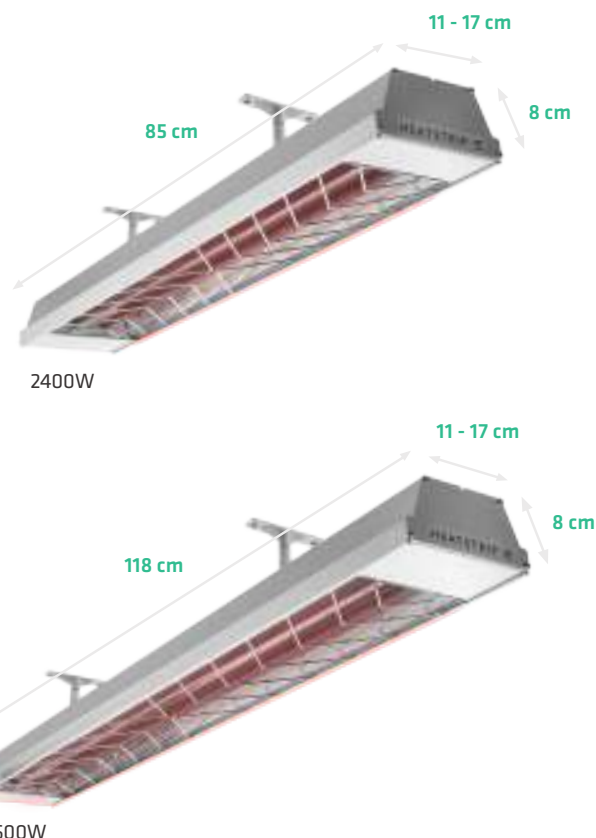

Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THX2400	6 m <sup>2</sup>	16 m <sup>2</sup>	2400	10	854 x 170 x 80	5	2000	Yes	2.1m	3.5m
THX3600	9 m <sup>2</sup>	24 m <sup>2</sup>	3600	15	1184 x 170 x 80	6	1000	No	2.1m	3.5m



## Accessories



Extension mounting bracket  
30 cm, 60 cm, 90 cm & 120 cm



Stand




Standard mounting bracket




Flush mount enclosure


## Table setting



2400 W




3600 W




## Mounting options


### Mounting

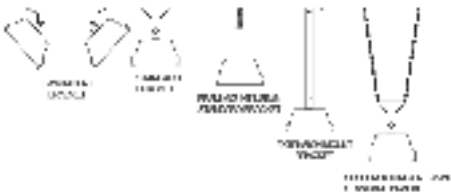

### Extension mounting brackets

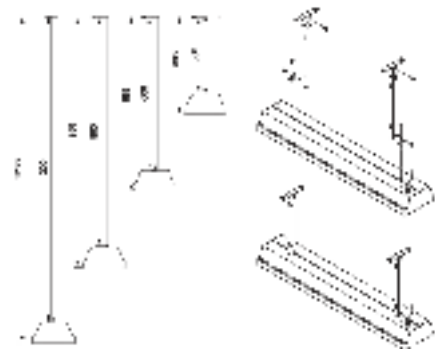

### Flush mount enclosure

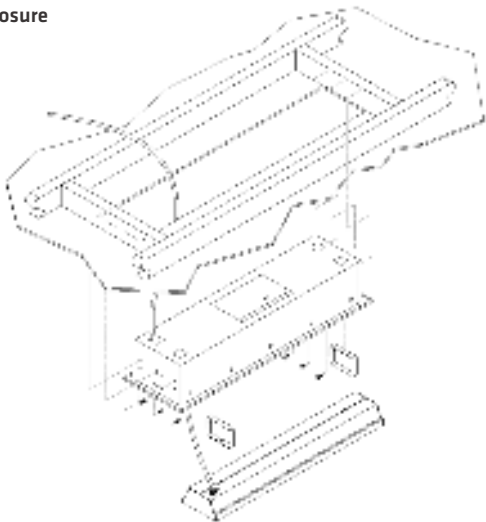

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THX2400	THXAC-030	935 x 250	980 x 180 x 290
THX3600	THXAC-031	1260 x 250	1310 x 180 x 290









# HEATSTRIP<sup>®</sup> Enhance











## HEATSTRIP® Enhance

This sleek, slimline heater with a smooth German Schott glass front is the perfect all-black electric heating solution for instant performance. Easily control the heater with the included remote and app, with a timer ranging from 0-24 hours and 3 different heating levels. Whether you need localised or direct spot heating indoors or outdoors, this heater is sure to meet your needs.

### Features:

- Indoor/outdoor electric radiant heater.
- 2 models available THG2400BA (2400 Watt) and THG3200BA (3200 Watt)
- Complete with adjustable mounting supports suitable for walls and ceilings
- Sleek, slimline appeal with a smooth German-made Schott glass front panel
- Remote, app plus smart home connectivity. Compatible with Google and Amazon smart home platforms. Bluetooth & WIFI
- Remote control provides 3 heat levels with adjustable timer options from 0-24 hours with the touch of a button.
- Convenient DIY Installation for the 2400W model. 3200W model must be hard-wired and installed by a licensed electrician.



Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THH2400AR	6 m <sup>2</sup>	9 m <sup>2</sup>	2400	10	920 x 187 x 76	8	1000	Yes	2.1 m	2.8 m
THH3200AR	9 m <sup>2</sup>	14 m <sup>2</sup>	3200	13.5	1020 x 187 x 76	10	1000	No	2.1 m	2.8 m



# Accessories




Standard mounting bracket




Flush mount enclosure

# Table setting



2400 W



2x2400 W



# Mounting options


## Mounting



## Standard mounting brackets



## Flush mount enclosure

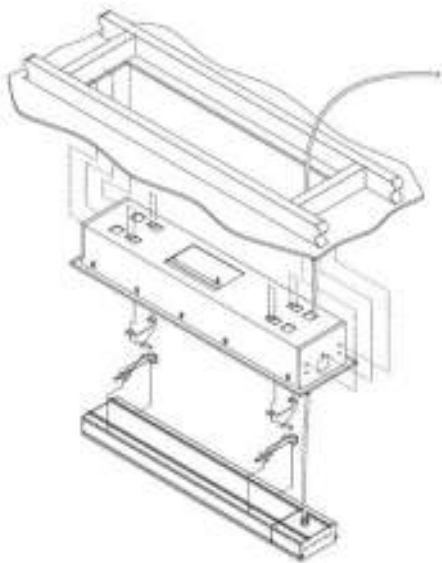


Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THG2400BA-EU	THGAC-001	1035 x 253	1091 x 308 x 181
THG3200BA-EU	THGAC-002	1135 x 253	1191 x 308 x 181

# HEATSTRIP<sup>®</sup> Intense





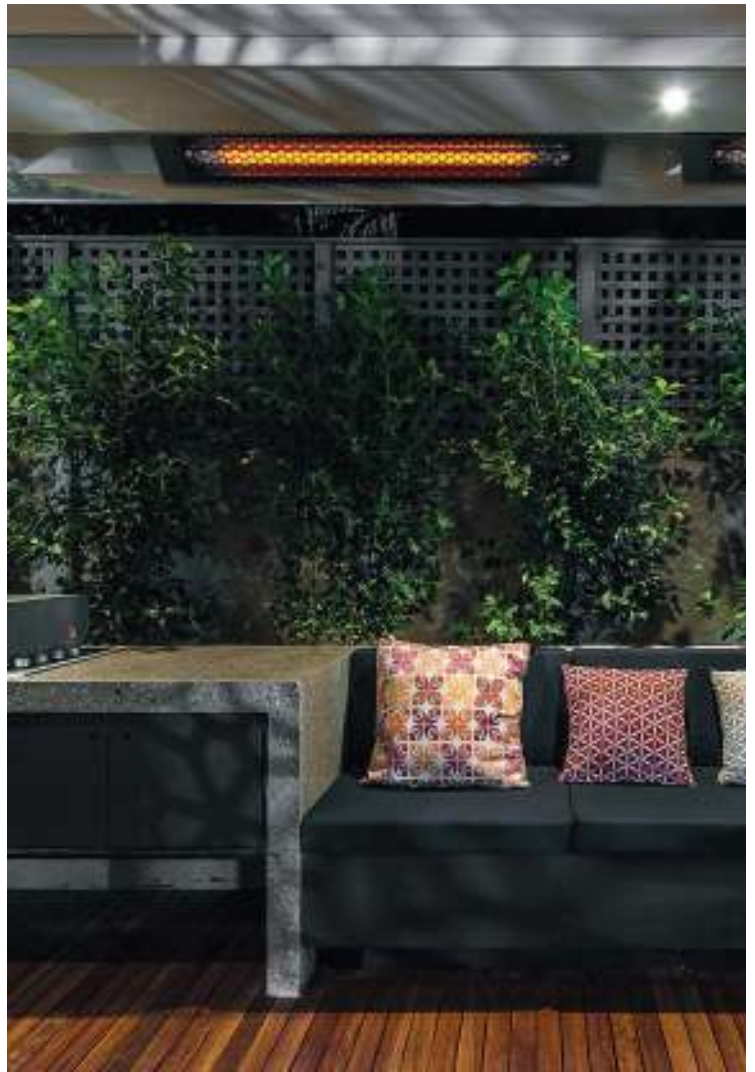





## HEATSTRIP® Intense

The HEATSTRIP® Intense Electric heater is an attractive outdoor heating solution, providing high output, instant heat. HEATSTRIP has successfully enabled many entertainment venues such as restaurants, pubs and clubs to utilise their outdoor dining areas day and night, through all seasons.

### Features:

- Easy DIY installation with brackets included
- Ideal for undercover protected and semi- exposed outdoor locations
- Complete with adjustable mounting supports suitable for walls and ceilings
- The device comes with an 3 meter electric lead and plug
- Voltage 230V, for United Kingdom 240V
- Low-maintenance and protection against corrosion
- Instantaneous, carbon-flament element
- High quality construction with a new hexagonal grille
- Carbon filament infra-red heating element provides high performance instant heat
- Australian design and development
- 2 year residential and 1 year commercial warranty
- IPX5 This means that the Heatstrips are 100% rain and weatherproof



Type	Surface area of covered patio	Surface area of enclosed space	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THY22003	9 m <sup>2</sup>	14 m <sup>2</sup>	2200	9.2	1068 x 120 x 90	6	3000	Yes	2.1 m	3.5 m
THX2400DCR	12 m <sup>2</sup>	19 m <sup>2</sup>	2400	10	979 x 170 x 80	6	1000	Yes	2.1 m	2.8 m

## Accessories



Extension mounting bracket  
30 cm, 60 cm, 90 cm & 120 cm



Standard mounting bracket



Stand




Flush mount enclosure

## Table setting



6x2200 W




## Mounting options


### Mounting



### Extension mounting brackets

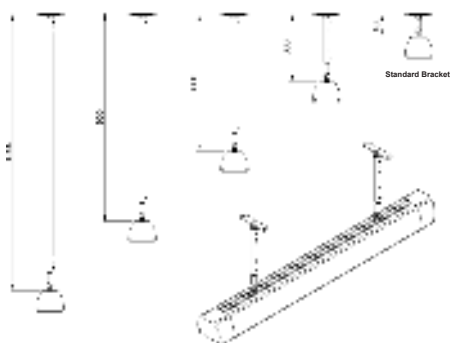

### Flush mount enclosure

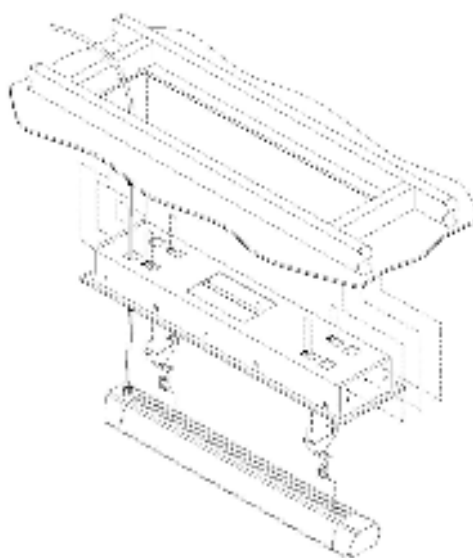

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THY2200	THYAC - 047B	1122 x 176	1150 x 204 x 190
THX2400DCR	THXAC-034	1088 x 234	1146 x 290 x 180



## HEATSTRIP® Stand

The HEATSTRIP free-standing heater, Model THAC-100 is the classy and refined solution, for when a portable, easy DIY electric heating option is required. Incorporating a sleek and robust stand, it is ideal for heating of tables, lounges, entertaining areas and work stations, both indoors and outdoors. The THAC-100 is suitable for all types up to 2400 watt, except the indoor.

### Features:

- Stylish, high quality portable, free- standing outdoor heater stand
- Ideal for alfresco areas, balconies, apartments & hospitality (indoor & outdoor use)
- Voltage 230V, for United Kingdom 240V
- Components are easy for DIY installation
- In-build wheels for easy portability, perfect for residential and commercial applications
- Corrosion protected by special e-coating treatment
- 2 year residential and 1 year commercial warranty



HEATSTRIP Intense 2200



HEATSTRIP Max 2400



HEATSTRIP Elegance 1800















# HEATSTRIP<sup>®</sup> Indoor












## HEATSTRIP® Indoor

Unique, modern, slimline conservatory heater, heating the immediate area to a pleasant temperature within ten minutes. It is also economical in its energy consumption. The HEATSTRIP Indoor is only suitable for indoor applications, for instance in conservatories, living rooms, garages, etc.

### Features:

- Water protection rating of IP45 and specifically
- Designed for indoor heating
- The device comes with an electric lead and plug (1200W + 2400W)
- Voltage 230V, for United Kingdom 240V
- Enhanced HEATSTRIP performance
- Suitable for multiple applications – commercial & residential
- Multiple mounting options allows for easy installation
- Low maintenance
- 4 year residential warranty and 2 year commercial warranty
- Standard mounting brackets are already included




Convective heat can be lost in uninsulated areas or naturally rise towards the roof in high ceiling locations.



Radiant heat is directed downwards to where it is required, and can be zoned to heat only those areas that are occupied.

Type	Surface area of covered patio	Power (watts)	Current (Amps)	Dimensions (LxWxH)	Weight (Kg)	Lead Length (mm)	Plug	Minimum mounting height	Maximum mounting height
THS1200A	8 m²	1200	5.0	924 x 235 x 48	6	1000	Yes	2.1 m	3.0 m
THS2400A	16 m²	2400	10	1834 x 235 x 48	11	1000	Yes	2.1 m	3.0 m


## Accessories



Standard mounting bracket



Angle mounting bracket



With mounting brackets




Flush mount enclosure

## Table setting




6x2400W



## Mounting options


### Mounting

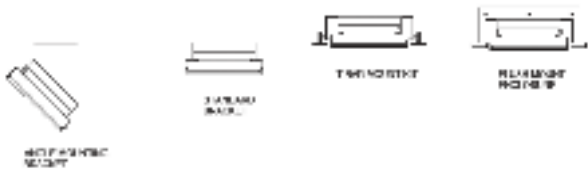

### Angle mounting bracket



### Flush mount enclosure

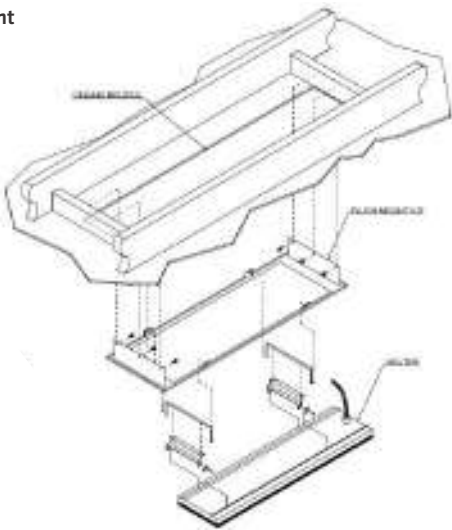

Suitable for model	Part No	Hole cutout dimensions (mm)	Overall dimensions (mm)
THS1200A	THSAC-026	1020 x 325	1040 x 345 x 100
THS2400A	THSAC-028	1930 x 325	1950 x 345 x 100






## HEATSTRIP® Wall Mounted Gas Heater

The HEATSTRIP Wall Mounted Gas heater, Model TGH34PL-2EU30 (LPG 30MB) and TGH34WNEU-2 (NG) are a stylish addition to any outdoor area, where mains Natural Gas is preferred. World class design aesthetics, heat output and performance, for both residential and commercial applications.

### Features:

- 34MJ (9,44 kWh), 4 tile commercial quality ceramic burners, for connection to mains gas
- The heater head unit is now full stainless steel with ultra high temperature paint finish
- The operation system is by finger pull tabs, with fully earthed thermocouple
- Protective grille and reflector included as standard, to guarantee safe Operation. Reflector design ensures that only a minimum of 500mm overhead clearance is required
- Wall mounting bracket allows for mounting angle, and is extremely robust to provide strength and support
- 2 year residential and 1 year commercial warranty

Type	Tiles	kWh	Ignition	Dimensions (LxWxH)
TGH34PL-2EU30	4	9,44	Electronic	650 x 190 x 380
TGH34WNEU-2	4	9,44	Electronic	650 x 190 x 380
TGH34..	..	..	..	..

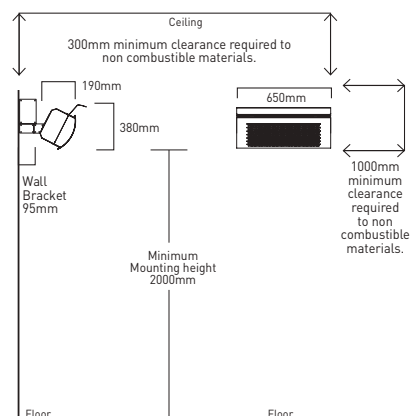



## HEATSTRIP® Gas Portable LPG Heater

The HEATSTRIP Gas portable LPG heater, Model TGH34PL incorporates world leading design, quality, heat performance and efficiency to provide a stylish, robust and elegant solution for your outdoor and open indoor alfresco areas, balcony, patio, halls & warehouses.

### Features:

- 34 MJ (9,44 kWh) and 4 tile commercial quality ceramic burners  
To be used with 9kg LPG bottle (not included)
- The operation system is by finger pull tabs, with fully earthed thermocouple
- Integrated wheels for easy portability and storage, allows you to heat exactly where you want it. Perfect for residential and commercial applications
- Components are sub-assembled for easy DIY installation
- Protective grille and reflector included as standard, to guarantee safe operation
- 2 year residential and 1 year commercial warranty
- Tilt switch: Gas supply stops as soon as the heater falls over




Optional:  
Cover



Heating output

Type	Tiles	kWh	Ignition	Dimensions (LxWxH)
TGH34PL30	4	9,44	Electronic	650 x 670 x 2118
TGHCOVER				650 x 670 x 2118

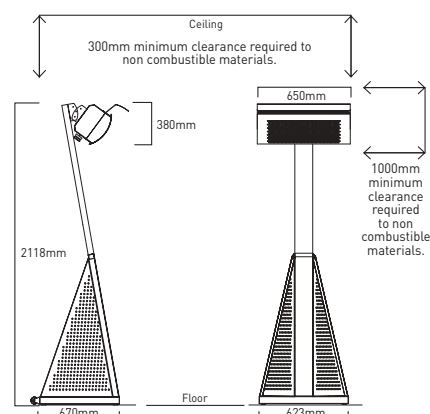



## HEATSTRIP CATALOGUS

Article number	EAN	Description	Packaging size LxBxH (mm)	Net Weight	Gross Weight
<b>HEATSTRIP Enhance</b>					
THG2400BA-EU	9334038006064	HEATSTRIP Enhance 2400 watt	995 x 930 x 135	6.5 kg	7.4 kg
THG3200BA-EU	9334038006071	HEATSTRIP Enhance 3200 watt	110 x 930 x 135	7.3 kg	7.9 kg
<b>HEATSTRIP INTENSE</b>					
THY22003EU	9334038004381	HEATSTRIP Intense 2200 watt 3M Cord	1110 x 160 x 160	5.2 kg	6.1 kg
THY2200P-EU	9334038004435	HEATSTRIP Intense 3M Cord + Stand	1150 x 350 x 300	19.4 kg	22.1 kg
THX2400DCR	9334038005104	HEATSTRIP Intense Max 2400 watt remote	979 x 170 x 80	6.0 kg	
<b>HEATSTRIP MAX</b>					
THX2400EU	9334038002806	HEATSTRIP Max 2400 watt	920 x 210 x 150	4.7 kg	6.0 kg
THX3600EU	9334038002820	HEATSTRIP Max 3600 watt	1250 x 210 x 150	6.2 kg	7.7 kg
<b>HEATSTRIP ELEGANCE</b>					
THE1800EU	9334038003551	HEATSTRIP Elegance 1800 watt	1045 x 200 x 100	4.3 kg	5.3 kg
THE2400EU	9334038003568	HEATSTRIP Elegance 2400 watt	1275 x 200 x 100	5.2 kg	6.3 kg
THE3600EU	9334038003575	HEATSTRIP Elegance 3600 watt	1875 x 200 x 100	7.4 kg	8.9 kg
THE2400EUR	9334038004633	HEATSTRIP Elegance 2400 watt remote	1390 x 200 x 100	6.0 kg	7.2 kg
THE3200EUR	9334038004640	HEATSTRIP Elegance 3200 watt remote	1790 x 200 x 100	7.6 kg	9.0 kg
THE2400EURA	9334038004749	HEATSTRIP Elegance 2400 watt remote & app	1390 x 200 x 100	6.0 kg	7.2 kg
THE3200EURA	9334038004756	HEATSTRIP Elegance 3200 watt remote & app	1790 x 200 x 100	7.6 kg	9.0 kg
<b>HEATSTRIP CLASSIC DESIGN</b>					
THH1500AEU	9334038002059	HEATSTRIP Classic Design 1500 watt	1000 x 200 x 100	4.4 kg	5.3 kg
THH2400AEU	9334038002097	HEATSTRIP Classic Design 2400 watt	1440 x 200 x 100	6.0 kg	6.9 kg
THH2400AEU3	9334038004060	HEATSTRIP Classic Design 2400 watt 3M Cord	1440 x 200 x 100	6.9 kg	7.4 kg
THH3200AEU	9334038008529	HEATSTRIP Classic Design 3200 watt	1840 x 200 x 100	7.3 kg	8.7 kg
<b>HEATSTRIP DESIGN</b>					
THD2400EUR	9334038004688	HEATSTRIP Design 2400 watt remote	1390 x 200 x 100	6.2 kg	7.4 kg
THD3200EUR	9334038004695	HEATSTRIP Design 3200 watt remote	1790 x 200 x 100	7.6 kg	9.0 kg
THD2400EURA	9334038004732	HEATSTRIP Design 2400 watt remote & app	1390 x 200 x 100	6.2 kg	7.4 kg
THD3200EURA	9334038004763	HEATSTRIP Design 3200 watt remote & app	1790 x 200 x 100	7.6 kg	9.0 kg
<b>HEATSTRIP DESIGN ALL BLACK</b>					
THD2400EU	9334038005852	HEATSTRIP Design 2400 watt All Black	1275 x 200 x 100	5.2 kg	6.5 kg
THD3600EU	9334038005869	HEATSTRIP Design 3600 watt All Black	1875 x 200 x 100	7.4 kg	8.9 kg
<b>HEATSTRIP INDOOR</b>					
THS1200AEU	9334038002844	HEATSTRIP Indoor 1200 watt	1000 x 260 x 100	5.6 kg	6.6 kg
THS2400AEU	9334038002882	HEATSTRIP Indoor 2400 watt	1905 x 260 x 100	10.4 kg	12.4 kg
<b>HEATSTRIP GAS HEATER</b>					
TGH34WNEU-2	9334038005197	Wall Mounted Naturel Gas Heater	720 x 340 x 385	11.3 kg	13.4 kg
TGH34PL-2EU30	9334038005494	Heatstrip Gasheater HEAD LPG 30MB	720 x 340 x 385	11.3 kg	13.2 kg
TGHCOVER	9334038003711	Cover Portable Heater	420 x 310 x 60	1.8 kg	2.0 kg
<b>HEATSTRIP STAND</b>					
THAC-100	9334038004411	Portable Electric Heaterstand	120 x 355 x 305	14.3 kg	17.7 kg
TGH30PL2STAND	9334038005586	Portable Gas Heaterstand	1115 x 720 x 250	14.3 kg	26.1 kg
<b>HEATSTRIP WALL CONTROLLER</b>					
TT-MTR	9334038002837	Wall controller /timer / remote	150 x 100 x 55	0.2 kg	0.3 kg
MTM	9334038008400	Wall controller/timer/remote/output	170 x 105 x 55	0.3	

Article number	EAN	Description	Packaging size LxBxH (mm)	Net Weight	Gross Weight
<b>HEATSTRIP FLUSH MOUNT ENCLOSURE</b>					
THYAC-053	9334038004152	Flush Mount Enclosure THY2200EU	1260 x 310 x 260	7.7 kg	9.6 kg
THXAC-030	9334038002868	Flush Mount Enclosure THX2400EU	1060 x 420 x 250	6.3 kg	8.6 kg
THXAC-031	9334038002875	Flush Mount Enclosure THX3600EU	1380 x 420 x 250	8.0 kg	10.6 kg
THXAC-034		Flush mount enclosure THX2400 DCR	1260 x 310 x 260	6.3 kg	8.9 kg
THEAC-040	9334038003612	Flush Mount Enclosure THE1800EU	1150 x 340 x 190	5.4 kg	6.7 kg
THEAC-041	9334038003629	Flush Mount Enclosure THE2400EU	1390 x 340 x 190	6.8 kg	8.0 kg
THEAC-042	9334038003636	Flush Mount Enclosure THE3600EU	2070 x 340 x 190	9.4 kg	12.0 kg
THERAC-056	9334038004558	Flush Mount Enclosure THE2400EUR(A)	1480 x 340 x 190	7.0 kg	9.0 kg
THERAC-057	9334038004565	Flush Mount Enclosure THE3200EUR(A)	1885 x 340 x 190	9.0 kg	11.0 kg
THHAC-009	9334038002417	Flush Mount Enclosure THH1500EU	1105 x 340 x 190	5.4 kg	6.7 kg
THHAC-011	934038002332	Flush Mount Enclosure THH2400EU	1545 x 340 x 190	7.5 kg	9.3 kg
THHAC-012	9334038002349	Flush Mount Enclosure THH3200EU	1960 x 340 x 190	9.3 kg	11.5 kg
THHAC-009MB	8719324696647	Flush Mount Enclosure THH1500EU (matt black)	11105 x 340 x 190	5.4 kg	6.7 kg
THHAC-011MB	8719324696654	Flush Mount Enclosure THH2400EU (matt black)	1545 x 340 x 190	7.5 kg	9.3 kg
THHAC-012MB	8719324696661	Flush Mount Enclosure THH3200EU (matt black)	1960 x 340 x 190	11.5 kg	9.3 kg
THDAC-058	9334038005623	Flush Mount Enclosure THD2400EUR(A)	1490 x 340 x 190	7.0 kg	8.8 kg
THDAC-059	9334038005630	Flush Mount Enclosure THD3200EUR(A)	1890 x 340 x 190	9.0 kg	11.1 kg
THDAC-060	9334038005548	Wall Mount Bracket THH Black	600 x 400 x 240	4.2 kg	4.2 kg
THDAC-061	9334038006156	Flush mount enclosure THD2400EU black	1390 x 340 x 190	8.0 kg	10.6 kg
THSAC-026	9334038002721	Flush Mount Enclosure THS1200EU	1100 x 420 x 200	3.5 kg	4.8 kg
THSAC-028	9334038002745	Flush Mount Enclosure THS2400EU	2020 x 420 x 200	5.0 kg	7.2 kg

**HEATSTRIP BRACKET / EXTENSION BRACKET INTENSE**

ZBRAK-132W	9334038004626	Bracket Mounting Kit THY New (Black)	150 x 155 x 40	0.2 kg	0.3 kg
THYAC-047B	9334038004336	Extension Pole 300mm Black 2pack	345 x 55 x 30	0.3 kg	0.4 kg
THYAC-048B	9334038004343	Extension Pole 600mm Black 2pack	645 x 55 x 30	0.5 kg	0.6 kg
THYAC-049B	9334038004350	Extension Pole 900mm Black 2pack	940 x 55 x 30	0.7 kg	0.8 kg
THYAC-050B	9334038004367	Extension Pole 1200mm Black 2pack	1310 x 55 x 30	1.0 kg	1.1 kg

**HEATSTRIP BRACKET / EXTENSION BRACKET ELEGANCE**

ZBRAK-113W	9334038003742	Bracket Mounting Kit THE New (White)	150 x 155 x 40	0.2 kg	0.3 kg
THEAC-058	9334038005173	Wall mount bracket THE (White)	600 x 400 x 240	3.3 kg	4.2 kg
THEAC-043W	9334038003643	Extension Pole 300mm White 2pack	345 x 55 x 30	0.2 kg	0.3 kg
THEAC-044W	9334038003650	Extension Pole 600mm White 2pack	645 x 55 x 30	0.5 kg	0.6 kg
THEAC-045W	9334038003667	Extension Pole 900mm White 2pack	940 x 55 x 30	0.7 kg	0.8 kg
THEAC-046W	9334038003674	Extension Pole 1200mm White 2pack	1310 x 55 x 30	1.0 kg	1.1 kg

**HEATSTRIP BRACKET / EXTENSION BRACKET DESIGN / MAX**

ZBRAK-113S	9334038003735	Bracket Mounting Kit THH New (Silver)	150 x 155 x 40	0.2 kg	0.3 kg
ZBRAK-113B	9334038003728	Bracket Mounting Kit THD (Black)	150 x 155 x 40	0.2 kg	0.3 kg
ZBRAK-132S	9334038004466	Bracket Mounting Kit THX (Silver)	150 x 155 x 40	0.2 kg	0.3 kg
THHAC-028	9334038004176	Wall mount bracket THH / THE (Silver)	545 x 170 x 260	3.2 kg	3.7 kg
THDAC-060	9334038005548	Wall mount bracket THH (Black)	600 x 400 x 240	3.3 kg	4.2 kg
THHAC-005S	9334038002288	Extension Pole 300mm Silver 2pack	345 x 55 x 30	0.2 kg	0.3 kg
THHAC-006S	9334038002295	Extension Pole 600mm Silver 2pack	645 x 55 x 30	0.5 kg	0.6 kg
THHAC-007S	9334038002301	Extension Pole 900mm Silver 2pack	940 x 55 x 30	0.7 kg	0.8 kg
THHAC-008S	9334038002318	Extension Pole 1200mm Silver 2pack	1310 x 55 x 30	1 kg	1.1 kg

**HEATSTRIP BRACKET / EXTENSION BRACKET INDOOR**

ZBRAK-92	9334038004619	Bracket Mounting Kit THS New (White)	210 x 55 x 60	0.2 kg	0.3 kg
THSAC-020	9334038002660	Angle mounting brackets THS	190 x 135 x 30	0.3 kg	0.4 kg













HEATSTRIP®

For more information about the HEATSTRIP  
and possibilities, visit our website.



[www.heatstrip.eu](http://www.heatstrip.eu)  
[www.heatstrip.co.uk](http://www.heatstrip.co.uk)

© HEATSTRIP